

ReSound Verso™



PRODUCT INFORMATION

Remote Microphone CIC

	Normal Power	High Power
Non-wireless	VO910-M VO710-M VO510-M	VO910-MP VO710-MP VO510-MP

Product Description

ReSound Verso™ sets a new standard for superior sound quality. This is accomplished by adding new and innovative technologies that further strengthen the Surround Sound by ReSound™ experience, our approach to treating sound like the human ear does.

Surround Sound by ReSound models, cleans, balances and stabilizes all sound input, immersing wearers in a high quality sound experience that's clean, rich, and vibrant. And with ReSound Verso, you have every model needed for a tailor-made hearing solution—from the ultra-cosmetic IIC to the top-performing high power BTE. It allows wearers to experience sound as it was meant to be heard ... like second nature.

Standard Configuration

- Remote microphone technology
- iSolate™ nanotech coated (faceplate and electronics)
- Size 10A battery
- 2 Power options
- Open fitting capabilities
- Available in 5 colors

Fitting Requirements


- Aventa® 3 fitting software (3.5 or higher)
- Non-wireless interface fitting options: Speedlink (recommended), NOAHlink® or HI-PRO® with either the CS53 flex strip plus CS44 socket cable, or the CS63 cable and flex strip combination

Price category: **Top** **Plus** **Basic**


Key Features	ReSound Verso™		
	9	7	5
ReSound Range™ II platform	●	●	●
Surround Sound by ReSound™			
<i>Model</i>			
Warp™ compression bands	17	17	9
Environmental Classifier	●	●	●
<i>Clean</i>			
NoiseTracker™ II (●/○)—with personalized noise reduction per environment (●●)	●●	●	○
Expansion	●	●	○
<i>Balance</i>			
Environmental Optimizer™ (●) or II (●●)	●●	●	
<i>Stabilize</i>			
DFS Ultra™ II—with Music Mode	●	●	●
Auto DFS™	●	●	●
Convenience Features			
SmartStart™	●	●	●
Push button (optional)	●	●	●
PhoneNow™ with auto-phone	●	●	●
iSolate™ nanotech	●	●	●
Fitting Features			
Gain handles	9	7	6
Fully customizable programs	4	3	2
Onboard Analyzer™ II datalogging	●	●	●

○ Standard
● Advanced
● Ultimate

Fitting Range



Normal Power



High Power

GN ReSound North America • 8001 Bloomington Freeway, Bloomington, MN 55420-1036 • Toll-free: 1-800-248-4327
www.gnresound.com • customerexperience@gnresound.com
 Government Services: 1-800-392-9932 • VAinfo@gnresound.com

GN ReSound Canada • 303 Supertest Road, Toronto, Ontario M3J 2M4 • Toll-free: 1-888-737-6863
www.gnresound.ca

ReSound

rediscover hearing

Technical Specifications

ANSI S3.22-2009, 2cc coupler

Remote Microphone CIC


V0910-M V0710-M V0510-M	V0910-MP V0710-MP V0510-MP
-------------------------------	----------------------------------

Normal Power	High Power
--------------	------------


Reference test gain (60 dB SPL input)	HFA	33	35	dB
Full-on gain (50 dB SPL input)	Max	44	52	dB
	HFA	41	49	dB
Maximum output (90 dB SPL input)	Max	113	117	dB SPL
	HFA	109	113	dB SPL
Total harmonic distortion	500 Hz	0.6	0.6	%
	800 Hz	0.6	0.8	%
	1600 Hz	1.0	0.7	%
Equivalent input noise (without noise reduction)		22	22	dB SPL
Frequency range (DIN 45605)		100-6990	100-7040	Hz
Current drain (in test mode)		1.1	1.1	mA

Data in accordance with ANSI S3.22-2009; Supply Voltage 1.3 V.


Maximum Output (OSPL 90)

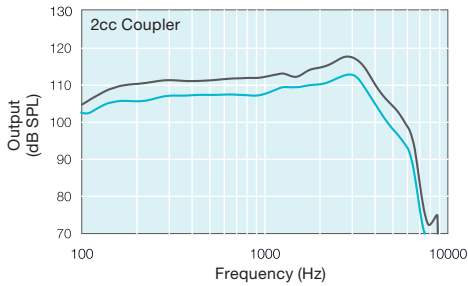

Input/Output Response

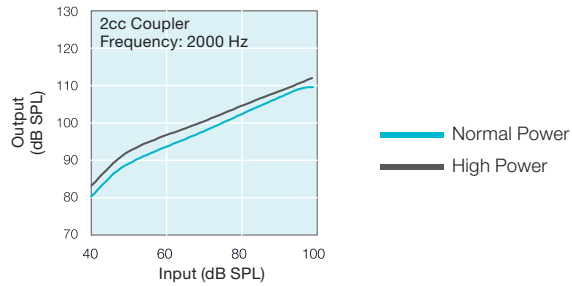

Full-On and Reference Test Gain

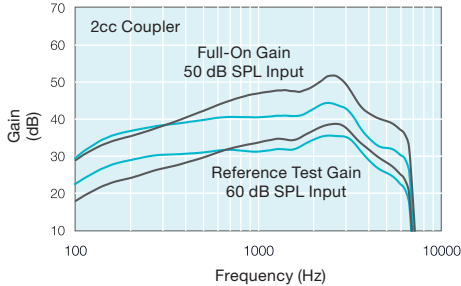

Parameter Settings*:

Normal Power: V0910-M, V0710-M, V0510-M

FOG	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[50]	45	46	45	46	48	46	47	45	45
G[80]	31	29	28	27	32	27	33	30	27

RTG	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[50]	41	42	41	42	44	42	43	41	41
G[80]	27	25	24	23	28	23	29	26	23

High Power: V0910-MP, V0710-MP, V0510-MP

FOG	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[50]	44	49	50	54	55	52	55	53	53
G[80]	32	32	31	35	37	33	38	38	35

RTG	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[50]	24	24	23	27	29	25	30	30	27
G[80]	36	41	42	46	47	44	47	45	45

*Settings in accordance with Aventa fitting software