

# ReSound Verso™

IIC



## PRODUCT INFORMATION

### Invisible-in-the-Canal (IIC)

	Normal Power
Non-wireless	VO910-C, VO710-C

### Product Description

ReSound Verso™ sets a new standard for superior sound quality. This is accomplished by adding new and innovative technologies that further strengthen the Surround Sound by ReSound™ experience, our approach to treating sound like the human ear does.

Surround Sound by ReSound models, cleans, balances and stabilizes all sound input, immersing wearers in a high quality sound experience that's clean, rich, and vibrant. And with ReSound Verso, you have every model needed for a tailor-made hearing solution—from the ultra-cosmetic IIC to the top-performing high power BTE. It allows wearers to experience sound as it was meant to be heard ... like second nature.

### Standard Configuration

- iSolate™ nanotech coated (faceplate and electronics)
- Size 10A battery
- Available in 2 faceplate colors with red/blue shells

### Fitting Requirements


- Aventa® 3 fitting software (3.4 or higher)
- Non-wireless interface fitting options: Speedlink (recommended), NOAHlink® or HI-PRO® with two 10A programming pill cables (left and right)

Price category: **Top** **Plus**

	ReSound Verso™	
	9	7
<b>Key Features</b>		
ReSound Range™ II platform	●	●
<b>Surround Sound by ReSound™</b>		
<b>Model</b>		
Warp™ compression bands	17	17
Environmental Classifier	●	●
<b>Clean</b>		
NoiseTracker™ II (⊙)—with personalized noise reduction per environment (●●)	●●	⊙
Expansion	●	⊙
<b>Balance</b>		
Environmental Optimizer™ (●) or II (●●)	●●	●
<b>Stabilize</b>		
DFS Ultra™ II—with Music Mode	●	●
Auto DFS™	●	●
<b>Convenience Features</b>		
SmartStart™	●	●
iSolate™ nanotech	●	●
<b>Fitting Features</b>		
Gain handles	9	7
Fully customizable programs	1	1
Onboard Analyzer™ II datalogging	●	●

● Ultimate ⊙ Advanced

### Fitting Range



**GN ReSound North America** • 8001 Bloomington Freeway, Bloomington, MN 55420-1036 • Toll-free: 1-800-248-4327  
**www.gnresound.com** • customerexperience@gnresound.com  
 Government Services: 1-800-392-9932 • VAinfo@gnresound.com

**GN ReSound Canada** • 303 Supertest Road, Toronto, Ontario M3J 2M4 • Toll-free: 1-888-737-6863  
**www.gnresound.ca**

# ReSound

rediscover hearing




IIC	
V0910-C	V0710-C

## Technical Specifications

ANSI S3.22-2009, 2cc coupler

Reference test gain (60 dB SPL input)	HFA	31	dB
Full-on gain (50 dB SPL input)	Max	36	dB
	HFA	35	dB
Maximum output (90 dB SPL input)	Max	111	dB SPL
	HFA	108	dB SPL
Total harmonic distortion	500 Hz	0.7	%
	800 Hz	0.6	%
	1600 Hz	0.9	%
Equivalent input noise (without noise reduction)		24	dB SPL
Frequency range (DIN 45605)		100-6690	Hz
Current drain (in test mode)		1.0	mA

Data in accordance with ANSI S3.22-2009; Supply Voltage 1.3 V.

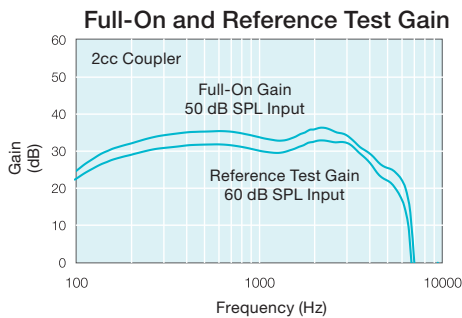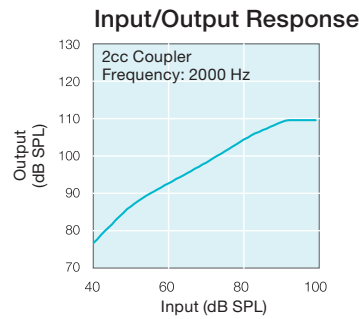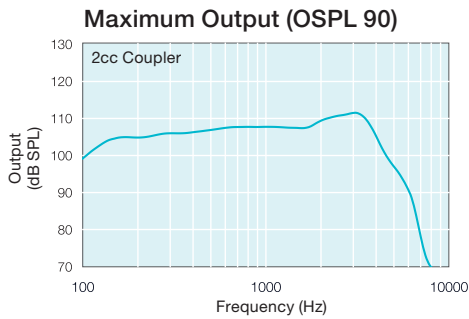

## Parameter Settings\*:

V0910-C, V0710-C

FOG	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[50]	42	42	42	41	42	42	39	40	40
G[80]	28	28	28	28	30	26	36	30	25

RTG	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[50]	42	42	42	41	42	42	39	40	40
G[80]	28	28	28	28	30	26	36	30	25

\*Settings in accordance with Aventa fitting software