

# ReSound ENZO™

The only Smart Super Power hearing solution

ReSound ENZO™ is a premium Super Power hearing aid specifically designed for people with severe to profound hearing loss. With both proven and new groundbreaking technologies ReSound ENZO is a revolution in the way super power users easily access the sounds that are important in their life in the best sound quality.

With a special implementation of Surround Sound by ReSound™ your super power patients get better speech understanding and a clear and comfortable hearing experience, without noise and feedback. A wide range of fitting rationales secure the optimal amplification mode to match experience and personal preferences.

ReSound ENZO is Made for iPhone, so your patients can enjoy phone calls, video chatting or listening to music on the go - and everything else iPhone, iPad or iPod touch have to offer with no need for an intermediary device. Also, it connects to the full range of ReSound Unite™ accessories. With the ReSound Smart™ app, your patients can personalize and control their hearing experience in an easy, discreet and intuitive way from iOS devices.

ReSound ENZO is for patients looking for maximum power. ReSound ENZO is iSolate™ nanotech coated inside and outside.

## Product Features

- Wireless connectivity to ReSound Unite accessories
- Wireless device-to-device connectivity
- Full iSolate™ nanotech coating
- Push button and programmable Volume Control
- Volume Control with programmable power down and mute function
- Choice of linear, semi-linear or WDRC sound processing
- Output compression options
- Low frequency boost
- Size 675 battery
- Telecoil with T and MT modes
- Supports Standard Earmold fittings

## Options

- Battery door with integrated On/Off switch and lock
- Battery door integrated Direct Audio Input and FM adaptor
- 10 different color combinations
- Standard hook and mini hook

## Fitting Software

- Aventa fitting software version 3.7 or higher
- Wireless fitting with Airlink™
- Speedlink, HI-Pro, or NOAHlink programming interfaces
- Battery integrated programming adapter with CS44 socket cable (with a fresh battery)




EO998-DW,  
EO798-DW,  
EO598-DW

	ReSound ENZO 9	ReSound ENZO 7	ReSound ENZO 5
--	----------------	----------------	----------------

	ReSound ENZO 9	ReSound ENZO 7	ReSound ENZO 5
ReSound SmartRange chip	●	●	●
<b>Surround Sound by ReSound</b>			
Model			
WARP™ Compression - number of bands	17	17	9
Environmental Classifier	●	●	●
Sound Shaper	●	●	●
Low Frequency Boost	●	⊙	○
Clean			
NoiseTracker™ II	●	⊙	○
Personalized Noise Reduction	●	●	●
WindGuard™	●	⊙	○
Expansion	●	⊙	○
Balance			
Binaural Directionality™	●	●	●
Directional Mix Processor	●	●	●
- Adjustable directional mix	●	●	●
Natural Directionality™ II	●	●	●
Synchronized SoftSwitching™	●	●	●
SoftSwitching™	●	●	●
AutoScope Adaptive Directionality™	●	●	●
MultiScope Adaptive Directionality™	●	●	●
Adaptive Directionality	●	●	●
Binaural Environmental Optimizer™ II	●	●	●
Environmental Optimizer™	●	●	●
Stabilize			
DFS Ultra™ II	●	●	●
- Music Mode™	●	●	●
Auto DFS™	●	●	●
<b>Convenience Features</b>			
Synchronized Push Button	●	●	●
Synchronized Volume Control	●	●	●
SmartStart™	●	●	●
PhoneNow™	●	●	●
Comfort Phone™	●	●	●
iSolate™ nanotech	●	●	●
<b>Fitting Features</b>			
Gain handles	9	9	9
Fully Flexible Programs	4	4	4
Synchronized Acceptance Manager	●	●	●
Onboard Analyzer™ II	●	●	●
Amplification strategy (WDRC/Semi.linear/Linear)	●	●	○
In Situ Audiometry	●	●	●
<b>Wireless connectivity</b>			
2.4 GHz Wireless Technology	●	●	●
2.4 GHz Device-to-Device Communication	●	●	●
Direct audio streaming (Made for iPhone)	●	●	●
Wireless fitting with Airlink™	●	●	●
ReSound Unite™ TV Streamer 2	●	●	●
ReSound Unite™ Remote Control 2	●	●	●
ReSound Unite™ Phone Clip+	●	●	●
ReSound Unite™ Mini Microphone	●	●	●
ReSound Control™ App (Phone Clip + is required)	●	●	●
ReSound Smart™ app	●	●	●

○ Basic  
● Advanced  
● Ultimate

## Fitting Range



ReSound ENZO is compatible with iPhone 5s, iPhone 5c, iPhone 5, iPad Air, iPad (4th generation), iPad mini with Retina display, iPad mini and iPod touch (5th generation) using iOS 7.X or later. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

# ReSound

rediscover hearing

# ReSound ENZO™


EO 98-DW

## Technical specifications


		IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 ANSI S3.22 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	61	54	dB
Full-on gain (50 dB SPL input)	Max.	86	83	dB
	1600 Hz/HFA	75	69	
Maximum output (90 dB SPL input)	Max.	145	141	dB SPL
	1600 Hz/HFA	136	131	
Total harmonic distortion	500 Hz	3,5	3,0	%
	800 Hz	1,0	0,7	
	1600 Hz	1,2	0,9	
Telecoil sensitivity (1 mA/m input)	Max.	116	-	dB SPL
Full-on telecoil sensitivity @ 1mA/m	HFA	-	116	
HFA-SPLIV Telecoil sensitivity @ 31.6 mA/m(ANSI)	1600 Hz / HFA	106	101	
Equivalent input noise w/o Noise reduction		22	26	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	-	
Frequency range (DIN 45605)		100-5830	100-5860	Hz
Current Drain (Quiescent / Operating)		1,3 / 1,7	1,3 / 3,3	mA

Data in accordance with IEC 60118-0, IEC 60118-7;  
Supply Voltage 1.3 V.

Maximum Output (OSPL 90)

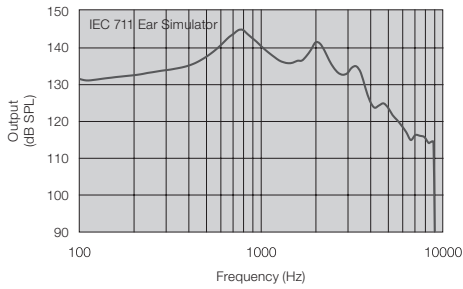


Maximum Output (OSPL 90)

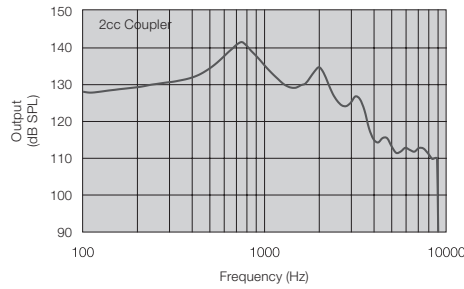


**Notes:**  
O.E.S. = Occluded Ear Simulator  
2cc = 2 cm<sup>3</sup> coupler  
Pi = Acoustic input signal

**Basic settings:**  
Full-on Gain, Reference Test Gain  
MPO = Maximum Power Output  
Maximum Band Width

Full-On and Reference Test Gain

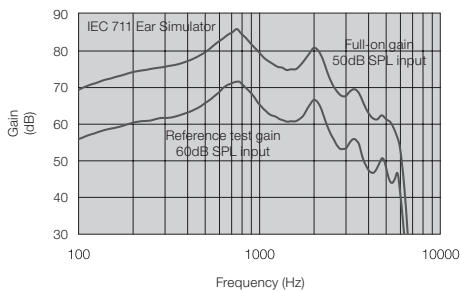


Full-On and Reference Test Gain

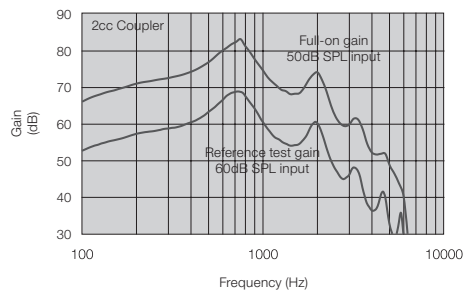


Measured according to IEC 60118-0 1983, amendment 1994; at 1.3 V, impedance 6.2 ohms and 23°C on O.E.S. according to IEC711 1981, resp on 2cc according to IEC60118-7 2nd edition 2005 (DIN average calculated at 500 Hz, 1000 Hz and 2000 Hz; HFA average calculated at 1000 Hz, 1600 Hz and 2500 Hz; 0 dB SPL sound pressure equals 20µPa). All measurements without DSP features activated unless indicated otherwise.

Input/Output Response



Telecoil response

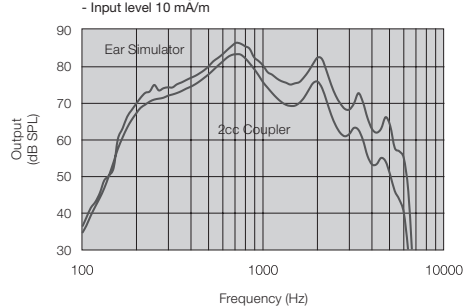

Patents pending

All specifications are subject to change without notice

400303011-US-14.08-RevB

**ReSound North America**  
8001 Bloomington Freeway  
Bloomington, MN 55420  
1-800-248-4327  
customerexperience@gnresound.com

**ReSound Government Services**  
8001 Bloomington Freeway  
Bloomington, MN 55420  
1-800-392-9932  
VAinfo@gnresound.com

**ReSound Canada**  
303 Supertest Road  
Toronto, Ontario M3J 2M4  
1-888-737-6863

**ReSound**

rediscover hearing